



FEATURES OF MINERALS AND MINERAL-BASED MATERIALS

Riskulov A. A.

DSc, Prof. of the Materials Science and Mechanical Engineering Department,
Tashkent State Transport University

Alimukhamedov Sh. P.

Dr. Tech. Sciences, Professor
of the Department of Materials Science and Mechanical Engineering, Tashkent
State Transport University, Tashkent, The Republic of Uzbekistan

Tursunov N. K.

Ph.D., Head of the Department of Materials Science and Mechanical Engineering,
Tashkent State Transport University, Tashkent, The Republic of Uzbekistan,
e-mail: u_nadir@mail.ru

Tursunov Sh. E.

Senior Lecturer of the Department of Materials Science and Mechanical
Engineering, State Transport University, Tashkent, The Republic of Uzbekistan

Toirov O. T.

Ph.D. Student of the Department of Materials Science and Mechanical Engineering,
Tashkent State Transport University, Tashkent, The Republic of Uzbekistan
e-mail: tv574toirov@mail.ru

Kuchkorov L. A.

Ph.D. Student of the Department of Materials Science and Mechanical
Engineering, Tashkent State Transport University, Tashkent,
The Republic of Uzbekistan

Abstract

Minerals are natural bodies homogenous in chemical composition and physical properties composing rocks, ores, nonmetallic minerals and other parts of the Earth crust. About 25% of minerals are silicates, 18% are phosphates and their analogs, 13% are sulfide compounds and about 12% are oxides and hydroxides.

Natural non-metallic materials of inorganic nature were the first materials used by humans for making implements and it was actually the first stone axe that opened the technology era hundreds thousands years ago. The properties of mineral-based non-metallic materials are various. They include the hardest materials applied for





metal processing by cutting (diamond, corundum, boron nitride, etc.) and relatively soft solid lubricating substances (graphite, molykote).

Keywords: Boron carbide; silicon carbide; ceramics-metals; synthetic electrocorundums; glass-fibre materials; synthetic diamonds; composition materials.

1. Introduction

Machine building widely applies natural minerals (asbestos, graphite, mica, etc.), products of their processing (ceramics, glass, stone casting, abrasive products, etc.) and synthetic minerals created in the image of natural (diamonds, sapphires, rubies, mica, etc.).

Regulation of phase and structural composition of glass, glass-ceramic substances (pyroceramics) and different types of ceramics is used to attain a necessary level of service properties of a great number of materials applied in different areas of technology. Inorganic non-metallic materials are the most important components of composition materials that strengthen them, make them heat resistant and give them other properties required in atomic power engineering, aviation and astronautics.

2. Methods

Hard and superhard materials

Super hard materials (microhardness is over 50 000 MPa) include cubic modifications of carbon (diamond) and boron nitride. Their properties are listed in Table 1.

Table 1. Main properties of superhard and hard materials

Parameters	Diamond	Cubic boron nitride	Boron carbide	Silicon carbide	Electrocorundum
Density, 10^3 kg/m^3	3,48–3,56	3,44–3,49	2,48–2,52	3,12–3,20	3,93–4,01
Microhardness, HPa	100	75–85	37–43	30–37	18–26
Elasticity modulus, HPa	900	720	296	365	350
Bursting stress, MPa: - in compression - in bending	2000 210–490	500 –	1800 210–280	1500 50–150	760 80–90
Linear extension coefficient, $10^{-6}/^\circ\text{C}$	0,9–1,45				
Heat resistance, $^\circ\text{C}$	800	–	210–280	50–150	80–90
Heat conductivity, $\text{Wt}/(\text{m}\cdot\text{k})$	138–146	–	4,5	3,8–6,5	7,5



Diamond is a crystalline modification of carbon with a face-centered cubic lattice in which each carbon atom is bound by strong covalent bonds to the three neighbours located in the vertex of a tetrahedron (dashed lines in Figure 1).

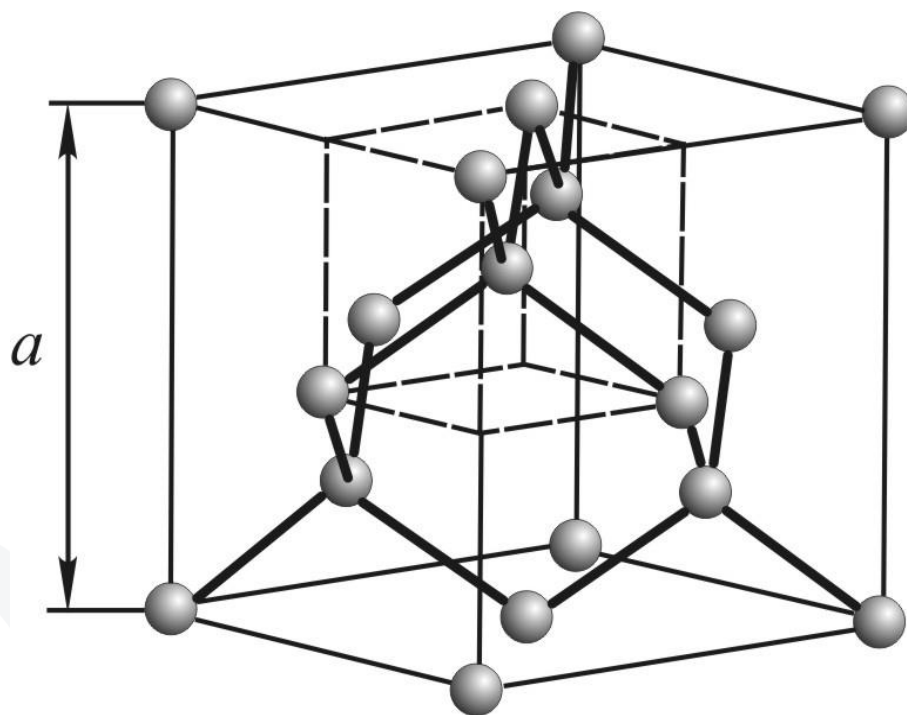


Figure 1. Schematic representation of diamond crystalline lattice: a is the parameter of lattice

The strong bonds and small distances between the atoms (0.154 nm) stipulate hardness of diamond maximum for minerals (10 units on the Mohs scale) and its high chemical stability. On heating up to 1800°C in the absence of oxygen diamond is converted into graphite, and in the presence of oxygen diamond burns at 870°C. Diamond has very high heat conductivity (5 times as high as copper heat conductivity), but it is a dielectric. In nature, diamonds occur as individual monocrystals whose size is measured in carats (one carat is equal to 200 mg) and artificial (synthetic) diamonds are mainly produced from graphite at temperatures of 1300-1600°C and pressure of 4.5-8.0 HPa.

Synthetic diamonds as dense polycrystalline formations (similar to the types of diamond called ballas and carbonado) are used in manufacture of portages, cutting tools and smoothers while synthetic diamonds as powders are applied for production of abrasive tools and abrasive pastes.

Baking of mixtures of synthetic and natural diamond micropowders serves for production of dense polycrystalline materials with a fine-grain structure, SV and sintered diamond powder. Their strength in uniaxial contraction reaches 5000 MPa.





Diamond materials of SB type are designated for crown bits and drilling instruments as well as saws used in cutting of hard non-metallic materials. Sintered diamond powder is used in manufacturing of chisels as well as cutting instruments (chisels, drilling tools, etc.) used in processing of nonferrous metals and alloys and plastics, including glass-fibre materials.

Boron nitride (BN) of crystalline cubic modification is produced only by synthesis from ordinary graphite-like BN. It is inferior to diamond in hardness but significantly surpasses it in heat stability. Moreover, boron nitride is chemically less active in respect to iron-and cobalt-based materials. In the United States, cubic boron nitride is produced under the name of borazon, and in the CIS countries it bears the names of el'bor and kubonit borazon materials. They are used for metal-cutting instrument used for processing of chilled steels, iron and alloys with the hardness $CHR > 40$. The stability of such an instrument is 10- to 20-fold higher than the stability of a hardmetal one. This property contributes to 2- to 4-fold increases in productivity of processing. The covalent carbides, boron and silicon carbides belong to very hard and chemical-resistant materials.

Boron carbide is a chemical compound of boron with carbon (B_4C), a dense substance with conchoidal fracture of a greyish-black color. It is only inferior to diamond and cubic boron nitride in hardness and abrasive effect (Table 1).

Silicon carbide or carborundum is a compound of silicon with carbon (SiC). It has two crystalline modifications – with a hexagonal lattice (α - SiC) and a cubic structure of a diamond type (β - SiC). Silicon carbide is distinguished by high hardness, heat conductivity, refractoriness, it is stable in various chemical media and also at high temperatures. It is used as abrasive (in grinding) for cutting of hard metals, for production of high temperature heaters, durable face seals as well as parts subjected to intensive corrosion and abrasive effects.

Properties and areas of application of metal carbides are exceptionally various. They are most high-melting of all the known substances, hard, durable and heat resistant. For example, the melting point of niobium carbide is equal to $3983^\circ C$ and the microhardness is 25000 MPa. The unique properties of these carbides are due to them representing interstitial phases when carbon atoms occupy cavities of densely packed metallic sublattices. Carbides are widely used as the main component of hard alloys, surfacing materials, coatings and as a strengthening phase of alloy steel.

Ceramics-metals (kermets) containing tungsten, titanium, tantalum, niobium carbides are the best instrumental materials for cutting metals and boring of rocks. Kermets are used to manufacture vanes for gas turbines and parts of jet engines.





Borides and nitrides of a wide range of metals are widely used in engineering, for example, molybdenum and tungsten borides are components of hard alloys; chrome and zirconium borides are heat resistant materials; titanium, chrome and tungsten borides are components of durable coating materials. Corrosion-proof and wear-resistant coatings are applied on goods made of creep-resisting steel.

Mineral Silicate-Based Materials

Silicate materials of the natural origin are mainly used as components of building materials, ceramics and glass. Some of them find application in various products of machine engineering.

Asbestos is a collective name for materials based on natural hydrosilicates. On mechanical effect asbestos is split into flexible and thin (up to $0.5 \mu\text{m}$) fibres with the length of up to 18 mm.

This material has a complex of unique natural properties (high mechanical strength, thermal stability, low heat and electric conductivities, high friction coefficient, elasticity, resistance to alkali, good adhesion to synthetic polymers, etc.).

The term asbestos unifies six structurally different, varying in composition and properties, silicate minerals of fibrous nature.

The most important industrial type of asbestos is chrysotile (the chemical formula is $3\text{MgO} \cdot 2\text{SiO}_2 \cdot 2\text{H}_2\text{O}$, the main properties are listed in Table 2) which serves for manufacture of asbestos cement, asbestos concrete, asbestos bitumen and textile goods as well as for production of asbestos cardboard, paper, felt, filters, heat insulating materials, brake bands, heat-resistant fillings and gaskets. etc.

Table 2. Main properties of chrysotile asbestos

Parameters	Values
Density, 10^3 kg/m^3	2,4-2,6
Hardness on the Mohs scale	2-3
Bursting stress in stretching along fibres, HPa	2,4-3,17
Elasticity modulus at a 0.01-mm^2 fibre cross-sectional area, HPa	175-210
Friction coefficient (according to steel without lubrication)	0,8
Relative elongation, %	1-2
Melting point, $^{\circ}\text{C}$	1550
Heat resistance, $^{\circ}\text{C}$	
- on long-term heating	500
- on short-term heating	700
Heat conductivity, $\text{Wt}/(\text{m}\cdot\text{K})$	0,147-0,151
Electric insulativity, $\text{Om}\cdot\text{m}$	$10^6\text{-}10^{10}$

Over the last 80-90 years asbestos has been widely used as the main filling of friction materials for brake mechanisms. However, as early as the late 1970s industrially developed countries started anti-asbestos campaigns. It was found that fibrous



asbestos microparticles released into the environment on abrasion of the material are biologically active substances with a pronounced carcinogenic effect.

In 1982, from the decision of the UNO General Assembly asbestos was placed into substances which are especially harmful for human health and whose consumption and sale are strictly limited.

The governments of the USA, Germany, France and other countries resolved to prohibit nearly all methods for asbestos application. Exception was made only for brake pads and friction components until less harmful substituents were available.

In spite of such serious steps undertaken by the world community Russia and Belarus have not imposed any limitations to application of asbestos.

The problem is that in addition to the ecological aspect important is a technical economic aspect of transition to asbestos-free friction components. For instance, one ton of asbestos costs 400-600 US dollars and one ton of its substituent (Kevlar fibres) costs 22 thousand dollars.

Nevertheless the necessity of development of asbestos-free friction materials created a problem in export of domestic automobiles and tractors. Research carried out in different countries (including Belarus) showed prospects in substitution of asbestos in manufacturing friction materials by such fibres as basalt, aramid fibre, carbon and glass fibres.

Quartz is the crystalline form of silicon dioxide, one of the most distributed (up to 12% of the Earth crust) wear resistant and stable materials. Its compression strength reaches 2000 MPa and its tensile strength -100 MPa, the melting point is 1470°C, the density - 2650 kg/m³, the hardness on the Mohs scale - 7 units. Quartz is chemically stable, optically anisotropic and possesses piezoelectrical properties. It occurs in nature mainly in a colorless state as well as in the form of colored crystals.

The varieties of quartz are amethyst, smoky quartz / topaz, mountain crystal etc. Single crystals of quartz are used in electrical engineering and radio engineering as piezoelectric transducers, filters, generators, whereas quartz powders are applied as components of abrasive materials and composites. Quartz sands and pure, the so-called veined quartz, are widely used in production of glass (including thermostable one, with special properties), porcelain and silicate bricks.

Mica is of crucial importance of all natural mineral electric insulating materials. Owing to high electrical strength, thermal stability and moisture-resistance, mechanical strength and flexibility mica is applied as insulation in condensers and electric machines operating at high voltages. Mica occurs in nature as crystals which represent aluminium silicates and are capable of splitting into thin, flexible and strong plates.





3. Results and Discussion

We should also note one more wonderful material, corundum, natural anhydrous alumina Al_2O_3 . Pure aluminium oxide is crystallized in a hexagonal lattice, and it is inferior only to diamond (9 units on the Mohs scale) in hardness and has a melting point of 2050°C and the Young modulus of the order of 350 HPa. The most clear transparent corundums are precious stones, such as red ruby and blue sapphire. The main raw materials for production of pure aluminium oxide are bauxites containing from 50 to 100 % Al_2O_3 .

Technical corundums (natural and particularly synthetic electrocorundums, Table 1) are used as abrasives in production of optics and during fine finishing of precision steel components.

Synthetic transparent corundum crystals are used for manufacture of jewels, trim strips and prisms of measuring instruments. Monocrystalline ruby rods are used in laser technology.

The most important varieties of mica are: muscovite or aluminium mica, with the composition being expressed by the formula $\text{K}_2\text{O}_3 \cdot \text{Al}_2\text{O}_3 \cdot 6 \text{SiO}_2 \cdot 2\text{H}_2\text{O}$, phlogopite or magnesium mica and vermiculite – aluminium silicate of magnesium and iron. Depending on its type the density of mica is 2200-3300 mg/m^3 , the melting point is $1200 - 1300^\circ\text{C}$, the hardness on the Mohs scale is 2.5-3.5, the electrical strength is 120 MW/m (muscovite). The nomenclature of mica brands is determined by GOST 10698-80. In addition to electric insulating purpose (muscovite, phlogopite) ground mica is used as heat insulator in steam boilers as well as components of plastics and rubbers (in auto-tires).

Powder-like vermiculite is wear-resistant and is similar to graphite in lubrication properties. Bloated vermiculite (GOST 12865-87) is used for manufacture of heat-insulating and sound-proof materials and as filling of rubbers, plastics and paints.

4. Conclusion

Synthetic diamonds as dense polycrystalline formations (similar to the types of diamond called ballas and carbonado) are used in manufacture of portages, cutting tools and smoothers while synthetic diamonds as powders are applied for production of abrasive tools and abrasive pastes.

Baking of mixtures of synthetic and natural diamond micropowders serves for production of dense polycrystalline materials with a fine-grain structure, SV and sintered diamond powder. Their strength in uniaxial contraction reaches 5000 MPa. Diamond materials of SB type are designated for crown bits and drilling instruments as well as saws used in cutting of hard non-metallic materials. Sintered diamond



powder is used in manufacturing of chisels as well as cutting instruments (chisels, drilling tools, etc.) used in processing of nonferrous metals and alloys and plastics, including glass-fibre materials.

The geological material used for production of technical goods includes basalt, gabbro and diaba s e. Their density is 2900...3300 kg/m³, the ultimate compressive strength is up to 500 MPa. They are used to manufacture measuring plates, sliding bearings, and components of some frictionless bearings. A promising and developing direction in application of these materials is manufacture of cast products (stone casting) and fibres.

The latter are successfully applied as strengthening wear-resistant components of composition materials. Presently stone casting is also used for processing of slags of metallurgic industry.

Stone casted products have ultimate compressive strength of 240 MPa, their ultimate tensile strength is 30 MPa and they also possess high wear-resistance.

References

1. Riskulov, A. A., Yuldasheva, G. B., & Toirov, O. T. (2022). FEATURES OF FLUOROCOMPOSITES OBTAINING FOR WEARING PARTS OF MACHINE-BUILDING PURPOSE. Web of Scientist: International Scientific Research Journal, 3(5), 1670-1679.
2. Riskulov, A. A., Yuldasheva, G. B., Kh, N., & Toirov, O. T. (2022). DERIVATION PROCESSES OF FLUORINE-CONTAINING WEAR INHIBITORS OF METAL-POLYMER SYSTEMS. Web of Scientist: International Scientific Research Journal, 3(5), 1652-1660.
3. Kayumjonovich, T. N., Pirmukhamedovich, A. S., & Teleubaevich, U. T. (2022). JUSTIFICATION AND CHOICE OF RATIONAL OPERATING CURRENT FREQUENCY IN INDUCTION CRUCIBLE FURNACES. Innovative Technologica: Methodical Research Journal, 3(06), 40-47.
4. Kayumjonovich, T. N. (2022). DEVELOPMENT OF A METHOD FOR SELECTING THE COMPOSITIONS OF MOLDING SANDS FOR CRITICAL PARTS OF THE ROLLING STOCK. Web of Scientist: International Scientific Research Journal, 3(5), 1840-1847.
5. Kayumjonovich, T. N., & Zokirov, R. V. (2022). THE METAL REFINING PROBLEM AND TECHNICAL SOLUTIONS FOR THE ACTIVE SLAG FORMATION IN INDUCTION FURNACES. Web of Scientist: International Scientific Research Journal, 3(5), 1755-1760.





6. Тоиров, О. Т., Кучкоров, Л. А., & Валиева, Д. Ш. (2021). ВЛИЯНИЕ РЕЖИМА ТЕРМИЧЕСКОЙ ОБРАБОТКИ НА МИКРОСТРУКТУРУ СТАЛИ ГАДФИЛЬДА. *Scientific progress*, 2(2), 1202-1205.
7. Toirov, B. T., Jumaev, T. S., & Toirov, O. T. (2021). Obyektlarni tanib olishda python dasturidan foydalanishning afzalliklari. *Scientific progress*, 2(7), 165-168.
8. Тен, Э. Б., & Тоиров, О. Т. (2021). Оптимизация литниковой системы для отливки. *Литейное производство*, (10), 17-19.
9. Тен, Э. Б., & Тоиров, О. Т. (2020). Оптимизация литниковой системы для отливки «Рама боковая» с помощью компьютерного моделирования. In *Прогрессивные литейные технологии* (pp. 57-63).
10. Азимов, Ё. Х., Рахимов, У. Т., Турсунов, Н. К., & Тоиров, О. Т. (2022). Исследование влияние катионов солей на реологический статус геллановой камеди до гелеобразования. *Oriental renaissance: Innovative, educational, natural and social sciences*, 2(Special Issue 4-2), 1010-1017.
11. Тоиров, О. Т. У., Турсунов, Н. К., & Кучкоров, Л. А. У. (2022). Совершенствование технологии внепечной обработки стали с целью повышения ее механических свойств. *Universum: технические науки*, (4-2 (97)), 65-68.
12. Мухаммадиева, Д. А., Валиева, Д. Ш., Тоиров, О. Т., & Эркабаев, Ф. И. (2022). ПОЛУЧЕНИЕ ПИГМЕНТА НА ОСНОВЕ ОСАДКОВ ЭЛЕКТРОХИМИЧЕСКОЙ ОЧИСТКИ ХРОМАТСОДЕРЖАЩИХ СТОКОВ. *Scientific progress*, 3(1), 254-262.
13. Кучкоров, Л. А., & Турсунов, Н. К. (2021). Исследование состава формовочных и стержневых смесей для повышения механических свойств. *Scientific progress*, 2(5), 350-356.
14. Kayumjonovich, T. N. (2022). RESEARCH AND IMPROVEMENT OF STEEL REFINING MODES IN INDUCTION FURNACES IN ORDER TO IMPROVE THE PRODUCTS QUALITY. *Web of Scientist: International Scientific Research Journal*, 3(5), 1713-1719.
15. Турсунов, Н. К., Семин, А. Е., & Котельников, Г. И. (2017). Кинетические особенности процесса десульфурации при выплавке стали в индукционной тигельной печи. *Черные металлы*, (5), 23-29.
16. Турсунов, Н. К., Семин, А. Е., & Санокулов, Э. А. (2017). Исследование процессов дефосфорации и десульфурации при выплавке стали 20ГЛ в индукционной тигельной печи с дальнейшей обработкой в ковше с использованием редкоземельных металлов. *Черные металлы*, (1), 33-40.





17. Турсунов, Н. К., Саноккулов, Э. А., & Семин, А. Е. (2016). Исследование процесса десульфурации конструкционной стали с использованием твердых шлаковых смесей и РЗМ. Черные металлы, (4), 32-37.
18. Рахимов, У. Т., Турсунов, Н. К., Кучкоров, Л. А., & Кенжаев, С. Н. (2021). Изучение влияния цинка Zn на размер зерна и коррозионную стойкость сплавов системы Mg-Nd-Y-Zr. Scientific progress, 2(2), 1488-1490.
19. Tursunov, N. K., Semin, A. E., & Sanokulov, E. A. (2017). Study of dephosphoration and desulfurization processes in the smelting of 20GL steel in the induction crucible furnace with consequent ladle treatment using rare earth metals. Chernye Metally, 1, 33-40.
20. Семин, А. Е., Турсунов, Н. К., & Косырев, К. Л. (2017). Инновационное производство высоколегированной стали и сплавов. Теория и технология выплавки стали в индукционных печах.
21. Tursunov, N. K., Semin, A. E., & Sanokulov, E. A. (2017). Research of dephosphorization and desulfurization processes in smelting of 20GL steel in an induction crucible furnace with further processing in a ladle using rare earth metals. Chern. Met, 1, 33-40.
22. Tursunov, N. K., & Ruzmetov, Y. O. (2018). Theoretical and experimental analysis of the process of defosphoration of steel used for parts of the mobile composition of railway transport. Journal of Tashkent Institute of Railway Engineers, 14(2), 60-68.
23. Тоиров, О. Т., Турсунов, Н. К., Кучкоров, Л. А., & Рахимов, У. Т. (2021). Исследование причин образования трещины в одной из половин стеклоформы после её окончательного изготовления. Scientific progress, 2(2), 1485-1487.
24. Нурметов, Х. И., Турсунов, Н. К., Туракулов, М. Р., & Рахимов, У. Т. (2021). Усовершенствование материала конструкции корпуса автомобильной тормозной камеры. Scientific progress, 2(2), 1480-1484.
25. Турсунов, Н. К., Уразбаев, Т. Т., & Турсунов, Т. М. (2022). Методика расчета комплексного раскисления стали марки 20гл с алюминием и кальцием. Universum: технические науки, (2-2 (95)), 20-25.
26. Kayumjonovich, T. N. (2022). THE PROBLEM OF METAL REFINING AND TECHNICAL SOLUTIONS FOR THE FORMATION OF ACTIVE SLAG IN INDUCTION FURNACES. Web of Scientist: International Scientific Research Journal, 3(5), 1996-2001.





27. Nurkulov, F., Ziyamukhamedova, U., Rakhmatov, E., & Nafasov, J. (2021). Slowing down the corrosion of metal structures using polymeric materials. In E3S Web of Conferences (Vol. 264, p. 02055). EDP Sciences.
28. Ziyamukhamedova, U., Rakhmatov, E., & Nafasov, J. (2021, April). Optimization of the composition and properties of heterocomposite materials for coatings obtained by the activation-heliotechnological method. In Journal of Physics: Conference Series (Vol. 1889, No. 2, p. 022056). IOP Publishing.
29. ZIYAMUKHAMEDOVA, U., MIRADULLAYEVA, G., RAKHMATOV, E., NAFASOV, J., & INOGAMOVA, M. (2021). Development of The Composition of a Composite Material Based On Thermoreactive Binder Ed-20. Chemistry And Chemical Engineering, 2021(3), 6.
30. Ziyamuxamedova, U. A., Miradullaeva, G. B., Nafasov, J. H., & Azimov, S. J. (2022). RESEARCH OF RHEOLOGICAL PARAMETERS AND SELECTION OF COMPOSITIONS FOR APPLICATION ON WORKING SURFACES OF STRUCTURAL MATERIALS OF LARGE TECHNOLOGICAL EQUIPMENT. Web of Scientist: International Scientific Research Journal, 3(5), 1720-1727.

